



HG Isolation Washer Bushing

Material:
Bridge Bearing
Neoprene

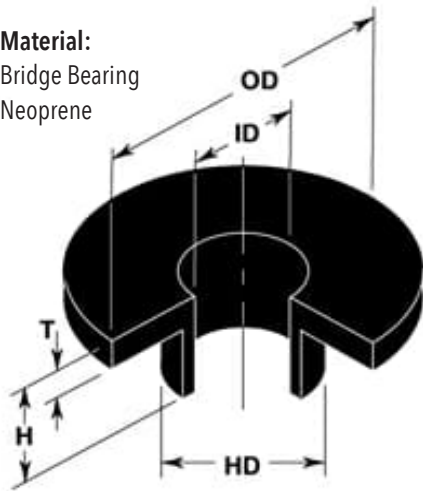


Bolt and Rod Isolation Washer - Bushings are for isolation noise and serve as minimum isolation of vibration where mounts and hangers are not required. These vibration isolation washers are made up of high quality bridge-bearing neoprene for maximum performance and life.

In seismic applications, the HG neoprene washer's reduce bolt shearing impact forces which can occur in seismic areas. These shearing forces are responsible for significant equipment movement observed after recent California earthquakes.



Bolt Isolation and Seismic Relief Application

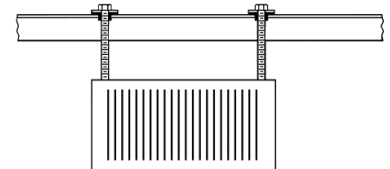

Acoustical Isolation

HD WASHER DIMENSIONS

Type & Size	Bolt Diameter	H	T	HD	ID	OD
HG-25	1/4"	3/8"	1/8"	1/2"	1/4"	1"
HG-38	3/8"	1/2"	1/8"	5/8"	3/8"	1-1/4"
HG-50	1/2"	1/2"	1/8"	3/4"	1/2"	1-5/8"
HG-63	5/8"	5/8"	3/16"	7/8"	5/8"	2"
HG-75	3/4"	5/8"	3/16"	1"	3/4"	2-1/4"
HG-100	1"	7/8"	1/4"	1-1/4"	1"	2-3/4"
HG-125	1-1/4"	7/8"	1/4"	1-1/2"	1-1/4"	3-1/4"
HG-150	1-1/2"	1"	1/4"	1-3/4"	1-1/2"	3-3/4"



ACOUSTICAL | SURFACES, INC.

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com