


ND Neoprene Mounts

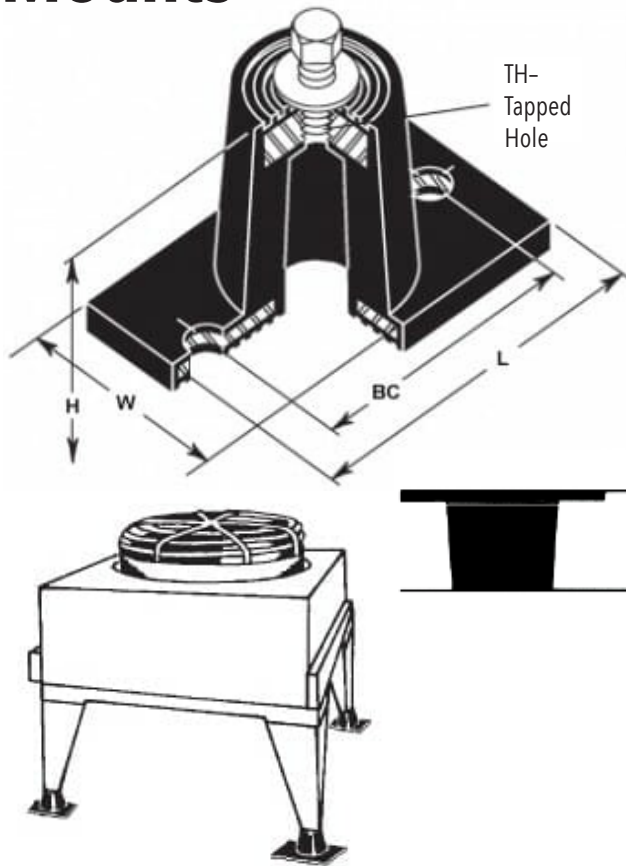

Looking for high frequency vibration mounts? The ND Neoprene Mounts are ideal for noise prevention. When you place neoprene isolators under equipment they run quieter and more reliably with less wear. Many times the noise control problem isn't the walls, ceiling or floors. It's the equipment.

ND Neoprene Mounts are designed for both high static deflections and simplified installation. The rubber in this neoprene isolator is loaded in both shear and compression to provide rubber in shear performance as well as overload protection. These neoprene isolation mounts are one piece molded assemblies with skid resistant rubber ridged base plates and circular rubber ridged tops. The complete neoprene covering of the metal parts provides corrosion protection in either humid indoor or outdoor service.

Use double deflection neoprene isolation mounts to isolate equipment having slowest rotational component speeds above 1200 RPM that are located in non-critical areas. When equipment is located on wide vibration sensitive spans, higher deflection spring neoprene isolators are generally required to cancel the effect of the floor span's deflection.

Bolting is not necessary on most installations. When the equipment has a flush drain pan or tank on the bottom, mounts can be inverted as shown so the base plate provides support over a larger area.

ND Mounts perform best when placed under equipment located on ground support concrete slabs, above stiff support walls and columns and rigid upper building spans.

ND DOUBLE DEFLECTION NEOPREME MOUNTS

Type & Size	Max Rated Capacity	Max Rated Deflection	Hardness (Durometer)	Dimensions				
				H	L	W	BC	TH
ND-A-Black	45 lbs	0.35"	30	1-1/2"	3-3/16"	1-5/8"	2-3/8"	5/16-18 x 3/4"
ND-A-Green	75 lbs		40					
ND-A-Red	125 lbs		50					
ND-B-Black	100 lbs	0.40"	30	1-7/8"	3-7/8"	2-5/16"	3"	3/8-16 x 1"
ND-B-Green	150 lbs		40					
ND-B-Red	235 lbs		50					
ND-B-White	380 lbs		60					
ND-B-Yellow	600 lbs		70					
ND-C-Green	260 lbs	0.50"	40	2-3/4"	5-1/2"	3-5/16"	4-1/8"	1/2-13 x 1"
ND-C-Red	400 lbs		50					
ND-C-White	600 lbs		60					



ACOUSTICAL SURFACES, INC.

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com