


# SMS-Flat

## Low-Profile Sound Masking Loudspeaker

The SMS-FLAT is a 25-volt system loudspeaker designed to generate the optimum sound masking spectrum in a very compact configuration. The sound masking speaker is equipped with a dual transducer in bipole configuration.

The white noise device is used in very tight plenum spaces or in open ceilings. The sound masking speaker is typically mounted directly above the deck. A rotary switch allows quick adjustment of the output level with 4W, 2W, 1W, 1/2W power available with a 25-Volt supply. The white noise device is also compatible with 70-Volt systems with 8W and 4W, adjustment available.

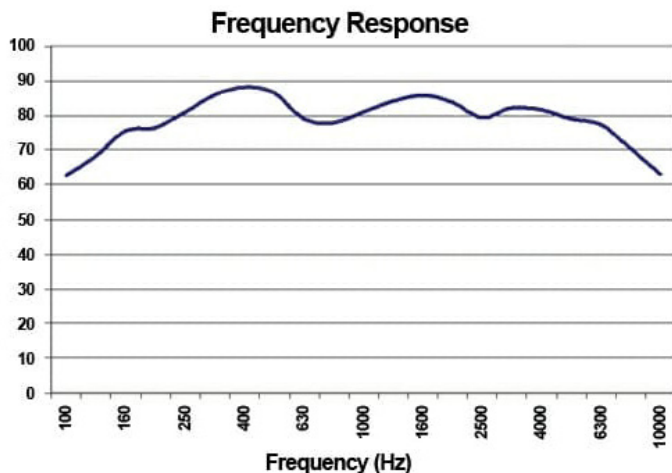

### SPECIFICATIONS

#### POWER

10 watts.

#### LINE VOLTAGE

25V & 70V.

#### SENSITIVITY

85 dB.

#### MATERIAL

Metal.

#### FREQUENCY RESPONSE

100-8,000 Hz.

#### CONNECTORS

Push Terminal & Lock-Screw.

#### DRIVER

Dual 1" x 4" (2.5 x 10 cm).

#### COLOR

Black & White.

#### WEIGHT

2.5 lbs (1.13 kg).

#### SHIPPING WEIGHT

2.7 lbs (1.21 kg).

#### SIZE (W x H x D)

7-7/16" x 5-5/16" x 2" (188 x 134 x 50 mm).

#### Test Reports & Additional Information Can be Found at:

<https://www.acousticalsurfaces.com/white-noise-system/low-profile-loudspeaker.html>



STOP NOISE

ACOUSTICAL | SURFACES, INC.

*Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!*

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com